
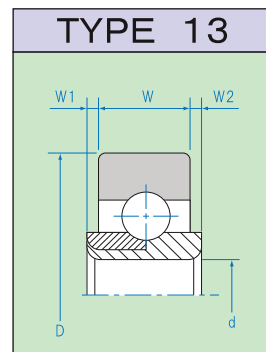
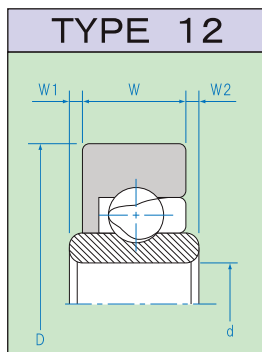
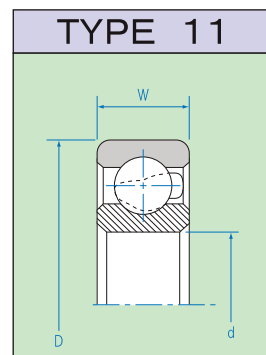
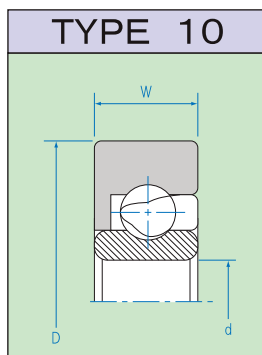


■ DR-H デルリンベアリング (外周フラット/内軸穴)

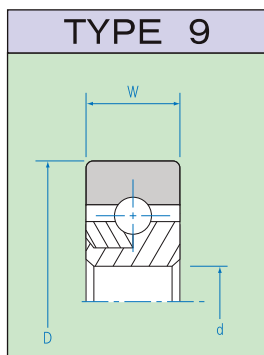

品番	$D_{-0.1}^0$ (mm)	$d_{0}^{+0.1}$ (mm)	$W_{-0.2}^0$ (mm)	$W1$ (mm)	$W2$ (mm)	Load (N) (kgf)	Type
DRS-9-H2.5	$9_{-0.05}^0$	$2.5_{0}^{+0.05}$	$3_{\pm 0.1}$	-	-	9.8 (1)	9
DRS-12-H3	$12_{-0.05}^0$	$3_{0}^{+0.05}$	$4_{\pm 0.1}$	-	-	9.8 (1)	
DR-18-H6	18	6	6	-	-	49 (5)	10
DR-19-H5	19	5	6	-	-	49 (5)	
DR-19-H6	19	6	6	-	-	49 (5)	
DR-20-H8	20	8	$6_{\pm 0.1}$	-	-	29.4 (3)	
DR-22-H6	22	6	7	-	-	196 (20)	
DR-22-H8	22	8	7	-	-	49 (5)	
DR-24-H6	24	6	7	-	-	196 (20)	
DR-24-H10.5	24	10.5	7	-	-	49 (5)	
DR-26-H6	26	6	7	-	-	196 (20)	
DR-26-H10	26	10	8	-	-	196 (20)	
DR-28-H6	28	6	7	-	-	196 (20)	
DR-30-H6	30	6	7	-	-	196 (20)	
DR-30-H10-9	30	10	9	-	-	245 (25)	
DR-30-H10-8	30	10	$8_{\pm 0.1}$	-	-	245 (25)	
DR-32-H12	32	12	10	-	-	294 (30)	
DR-35-H6	35	6	7	-	-	196 (20)	
DR-35-H15	35	15	$11_{\pm 0.2}$	-	-	294 (30)	
DR-38-H10	38	10	$8_{\pm 0.2}$	-	-	196 (20)	
DR-40-H6	$40_{-0.2}^0$	6	8	-	-	196 (20)	
DR-40-H17	40	17	$12_{\pm 0.2}$	-	-	294 (30)	
DR-47-H20	47	20	$14_{\pm 0.2}$	-	-	343 (35)	
DR-18-H8	18	8	5	-	-	49 (5)	11
DR-16-H4.1W0.25	16	4.1	4	0.25	0.25	19.6 (2)	
DR-19-H4W(1.3)3	19	4	6	1.3	3	49 (5)	12
DR-19-H5W(0)2.3	19	5	6	0	2.3	49 (5)	
DR-22-H4W(0.5)3	22	4	7	0.5	3	196 (20)	
DR-22-H6W1	22	6	7	1	1	196 (20)	
DR-24-H6W1	24	6	7	1	1	196 (20)	
DR-26-H4W(0.5)3	26	4	7	0.5	3	196 (20)	
DR-26-H6W1	26	6	7	1	1	196 (20)	
DR-28-H6W1	28	6	7	1	1	196 (20)	
DR-30-H6W1	30	6	7	1	1	196 (20)	
DR-35-H6W1	35	6	7	1	1	196 (20)	
DR-40-H6W0.5	$40_{-0.2}^0$	6	8	0.5	0.5	196 (20)	
DR-47-H8W(0)9	47	8	14	0	9	196 (20)	
DRS-16-H4.1W0.25	16	4.1	$3.5_{\pm 0.2}$	0.25	0.25	49 (5)	13

*1 参考値 [=Reference Dimension]

*2 許容荷重 (毎分300回 回転時) [=Allowable Load at 300min⁻¹ (300r.p.m.)]